

Dual-Band Slotted Millimeter Wave Antenna at 28/38 GHz for 5G Applications

Abubakar Salisu^{1,3*}, Mustapha Abubakar Modibbo^{2,3}, Atta Ullah¹, Umar Musa⁴, Ibrahim Gharbia¹, Umar S. Usman⁵, A. S. Hussaini^{1,6,7}, I.T.E. Elfergani⁷, J. Rodriguez^{7,8}, R.A. Abd-Alhameed¹

¹Department of Electronics and Biomedical Engineering, University of Bradford, United Kingdom
{a.salisu, aullah5, i.o.i.gharbia, a.s.hussaini7, r.a.a.abd}@bradford.ac.uk}

²School of Electrical Engineering, Southeast University, Nanjing, China
{ma_modibbo, 223217108}@seu.edu.cn}

³Department of Electrical and Electronics Engineering, MAU Yola, Nigeria
{mamodibbo, abubakarsalisu06}@mau.edu.ng}

⁴Department of Electrical Engineering, Bayero University Kano, Nigeria
{umusa.ele@buk.edu.ng}

⁵Department of Electrical and Computer Technology, Gombe State Polytechnics Bajoga, Nigeria
{sabo@gspb.edu.ng}

⁶School of Engineering, American University of Nigeria, Yola
{ash.hussaini@aun.edu.ng}

⁷Instituto de Telecomunicações – Aveiro, Portugal
{i.t.e.elfergani, ash, jonathan}@av.it.pt}

⁸University of South Wales, Pontypridd CF37 1DL, UK
{jonathan.rodriguez@southwales.ac.uk}

Abstract— Modern communication systems enable the rapid development of microstrip patch antennas. Their lightweight and compact profile makes patch antennas increasingly popular today. They are easy to manufacture and seamlessly integrate into feeding networks, making them highly versatile for modern applications. This paper presents a single-feed, dual-band slotted antenna designed for 5G applications, operating in the 28 GHz and 38 GHz millimeter-wave bands with enhanced bandwidth. The antenna design uses a Rogers 5880 substrate with a relative permittivity of 2.2 and a loss tangent of 0.0009, modeled with CST software. The microstrip antenna measures 20 x 20 x 0.787 mm³ and features a cylindrical patch on top, with inner and outer radii of 3.00 mm and 4.32 mm, and a thickness of 0.787 mm. Initially, a cylindrical radiator is configured to resonate at 38 GHz; subsequently, a symmetrical four-cone slot is introduced on the cylindrical radiator to enable an additional resonant frequency at 28 GHz. Simulation results indicate reflection coefficients of -27.83 dB at 28 GHz and -49.47 dB at 38 GHz, with achieved bandwidths of 0.765 GHz in the lower band and 1.29 GHz in the upper band, and gains of 7.52 dBi and 6.67 dBi, respectively.

Keywords— Four cone slots, 5G, Cylindrical Shape and millimeter wave.

1 INTRODUCTION

Antennas for fifth-generation (5G) wireless communication have recently attracted considerable interest [1]-[3]. Millimeter-wave (mmWave) antennas play a critical role in 5G applications due to their capabilities for high-speed, low-latency data transmission, and increased data rates. With the rapid growth of internet applications driving demand for higher data rates and expanded bandwidth, researchers are exploring new frequency bands to support the future of wireless communication technologies [4]. Numerous studies investigate various mmWave antenna designs to meet these demands [5]-[8].

The 5G Partnership Project has standardized several frequency bands to optimize 5G performance, including 28 GHz, 38 GHz, and 60 GHz, each tailored for specific applications. Consequently, patch antennas with single, dual, or multiband configurations are needed to accommodate these frequencies [4-9]. The FCC has allocated the 28 GHz, 37 GHz, 39 GHz, and 64–71 GHz bands specifically for 5G use [10]. Among these, the 28 GHz and 38 GHz frequencies are particularly prevalent in next-generation mmWave communication systems for 5G applications [9]. A dual-band antenna capable of operating at both 28 GHz and 38 GHz is highly beneficial for a range of applications [10-14]. In [6], a copper-tapered slot antenna with a simple design is proposed, covering the 24.25–28.35 GHz range. Another study [4] introduces an antenna with a U-slot in the ground plane to achieve a broader bandwidth for 5G mmWave applications, though its bandwidth is still limited and does not fully encompass the 28 GHz and 38 GHz mmWave bands. In [15], a four-element

dual-mode planar monopole antenna, measuring $20 \times 20 \text{ mm}^2$, offers a moderate bandwidth of 1.75 GHz in the lower band. According to references [21-25], the desired bandwidth for a dual-band antenna is approximately 1.9% at 38 GHz and 3% at 28 GHz. Reference [12] describes a 5G dipole antenna with a broad bandwidth ranging from 26.5 to 38.2 GHz and an approximate gain of 5 dBi. In [13], an antenna that operates at 24 GHz and 28.5 GHz achieves gains of 3.5 dBi and 4 dBi at these frequencies, respectively. A microstrip patch antenna in [14] provides a bandwidth of 1.3 GHz at 28 GHz and 1 GHz at 45 GHz, with gains of 7.6 dBi and 7.21 dBi, respectively. Reference [15] introduces a dual-band antenna operating at 28 GHz and 38 GHz, achieving bandwidths of 1.43 GHz and 3.54 GHz and gains of 2.7 dBi and 6 dBi, respectively. Additionally, an H-shaped slot dual-band patch antenna in [16] provides bandwidths of 3.2 GHz at 28 GHz and 5.3 GHz at 38 GHz, with gains of 8.4 dBi and 6.1 dBi, respectively. In [17], a novel rectangular dielectric resonator antenna is described for 5G applications, offering operation at 28 GHz and 38 GHz with bandwidths of 1.49 GHz and 1.01 GHz and gains of 5.41 dBi and 4.89 dBi, respectively. In [18], discusses a dual-band microstrip antenna with a defected ground structure (DGS), which achieves a bandwidth of 4.1 GHz and a gain of 6 dBi at both 28 GHz and 38 GHz. Various other studies [19-22] present dual-band antennas designed for 28 GHz and 38 GHz operation, each offering distinct bandwidth and gain characteristics tailored to specific applications. In [23], a notched antenna design is created by introducing a cut in the feed line, which enables effective radiation in the 30-34 GHz range while maintaining functionality at both 28 GHz and 38 GHz.

Dual-band antennas are typically favored over single-band designs due to their broader bandwidth and versatility in supporting multiple frequencies. This paper introduces a novel 5G antenna operating at 28 GHz and 38 GHz, incorporating a distinctive cross-shaped structure with four cone-shaped slots at the center of a cylindrical patch, which greatly enhances both bandwidth and gain.

This work presents a dual-band slotted millimeter-wave (mmWave) microstrip antenna with a symmetrical four-cone slot configuration, enabling efficient operation at both 28 GHz and 38 GHz frequency bands. The antenna design was modeled and simulated in CST Microwave Studio software, yielding detailed performance data that validate the proposed design's effectiveness in achieving the targeted dual-band functionality.

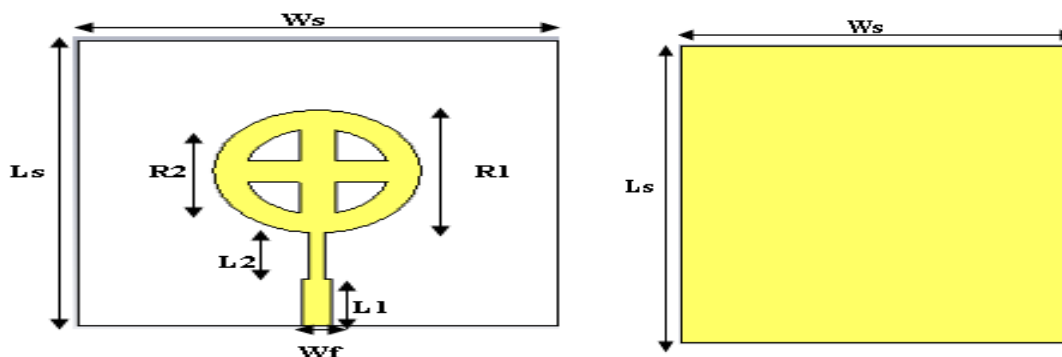


Fig. 1. The Proposed Dual Band Antenna Schematic Diagram (Front and back view)

The proposed dual-band antenna was initially designed to operate at 38 GHz. To achieve a second operational frequency at 28 GHz, a cross structure was introduced, creating four cone slots at the center of a cylindrical patch, as illustrated in Fig. 1 above. This addition enables the antenna to effectively cover both 28 GHz and 38 GHz frequency bands, enhancing its versatility for dual band 5G applications.

TABLE I. VALUE OF THE PROPOSED DESIGN PARAMETERS

Parameter.	Wf	L1	L2	Ws	Ls
Values in (mm)	1.23	3.3	3.21	20	20
Parameter.	R1	R2			
Values in (mm)	4.32	3.0			

2 SIMULATION RESULTS

The prototype antenna has dimensions of $L \times L = 20 \times 20 \text{ mm}^2$. It is built using Rogers RT 5880 substrate material, which has a thickness $h = 0.787 \text{ mm}$ and a dielectric constant $\epsilon_r = 2.2$. To achieve a multi-mode resonance feature, a symmetrical design with four cone-shaped slots is introduced. The dual-band antenna design process involves two primary stages, as illustrated in Figure 1. In the first stage, a cylindrical antenna patch is created with an outer radius $R_1 = 4.32 \text{ mm}$ and an inner radius $R_2 = 3.0 \text{ mm}$. Through parametric sweeps, this configuration achieves an initial resonance frequency at 38 GHz. A 50Ω microstrip line is used to feed the patch, with a width $W_f = 1.23 \text{ mm}$ and length $L_f = 3.3 \text{ mm}$. In the second stage, to introduce a second resonance mode at 28 GHz, a cross-shaped structure is added to the center of the cylindrical patch, forming four cone-shaped slots. This additional structure enables dual-band operation by producing the desired second resonance mode. The antenna design is simulated in CST to analyse the reflection coefficient. The resulting design achieves two operational frequency bands, as shown in the figure 1, one centered around 28 GHz and the other around 38 GHz. The bandwidths for $|S_{11}| < -10 \text{ dB}$ are 0.765 GHz covering from 27.473—28.238 GHz band as well as 1.29 GHz covering from 37.356—38.646 GHz band, making the antenna suitable for recent 5G applications.

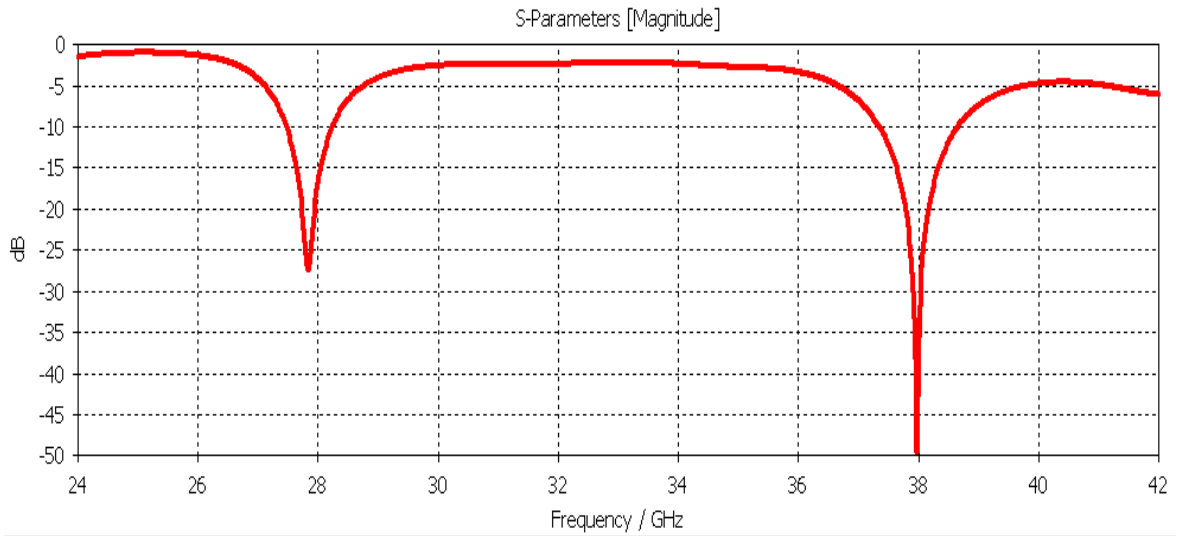


Fig. 2. The Reflection Coefficient of the Proposed Dual-Band Slotted Antenna.

The radiation patterns of the designed antenna are evaluated through numerical simulations. Figure 3 presents the 3D radiation patterns at the operating frequencies of 28 GHz and 38 GHz, illustrating the antenna's performance in terms of directionality and gain at these frequencies.

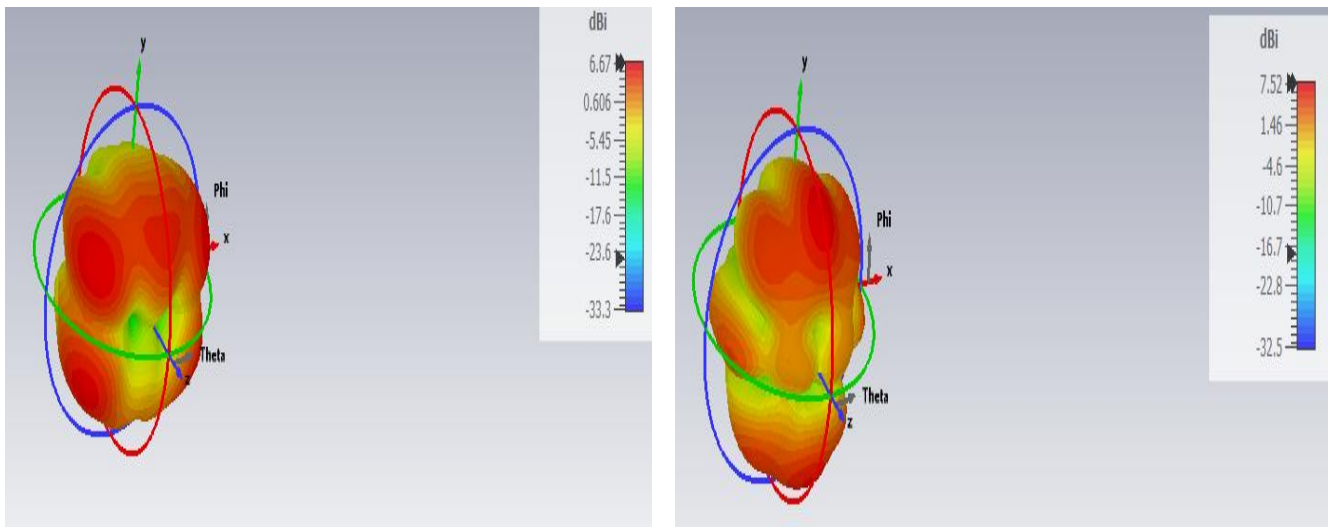


Fig. 3. The 3-D Radiation Patterns (a) $f=28$ GHz (b) $f=38$ GHz

3 CONCLUSIONS

This paper presents an enhanced dual-band millimeter-wave slotted antenna designed for 5G mobile networks. The resulting dual-band microstrip patch antenna operates at 27.29 GHz and 37.97 GHz, achieving S_{11} values of -27.8 dB and -49.47 dB, respectively. The antenna's design begins with a cylindrical patch intended to resonate at 38 GHz. To introduce a second resonance at 28 GHz, a cross-shaped structure is added at the center, creating four symmetrical cone-shaped slots in the cylindrical patch. This dual-resonance structure is fabricated on a Rogers 5880 substrate with a thickness of 0.787 mm and a dielectric constant of 2.2. Initially, the antenna is configured to resonate at 38 GHz. Then, by adding the cone-shaped slots at the center of the cylindrical radiator, a secondary resonance at 28 GHz is achieved. The design attains a maximum directivity of 6.67 dBi at 28 GHz and 7.52 dBi at 38 GHz. The -10 dB impedance bandwidths for each band are 0.756 GHz and 1.29 GHz, making this antenna suitable for dual-band operation in modern 5G applications.

REFERENCES

- [1] Parchin, N.O., Mohamed, H.G., Moussa, K.H. et al. An efficient antenna system with improved radiation for multi-standard/multi- mode 5G cellular communications. *Sci Rep* 13, 4179 (2023). <https://doi.org/10.1038/s41598-023-31407-z>.
- [2] N. O. Parchin et al., "Four-Element/Eight-Port MIMO Antenna System With Diversity and Desirable Radiation for Sub 6 GHz Modern 5G Smartphones," in *IEEE Access*, vol. 10, pp. 133037- 133051, 2022, doi: 10.1109/ACCESS.2022.3227199.
- [3] A. Ullah, N. Ojaroudi Parchin, A. S. I. Amar, and R. A. Abd- Alhameed, "Eight-Element Antenna Array with Improved Radiation Performances for 5G Hand-Portable Devices," *Electronics*, vol. 11, no. 18, p. 2962, Sep. 2022, doi: 10.3390/electronics11182962.
- [4] Muhammad, Yaro, & Alhassan, 2018; Nosrati & Tavassolian, 2017.
- [5] J. Helander, K. Zhao, Z. Ying and D. Sjöberg, "Performance analysis of millimeter-wave phased array antennas in cellular handsets," *IEEE Antennas and Wireless Propagation Letters*, vol. 15, pp. 504-507, 2016.
- [6] Salisu, A., et al. "Dual Band Microstrip Patch Array Antenna for LTE Applications in Malaysia." *Proceedings of the 1st International Multi-Disciplinary Conference Theme: Sustainable Development and Smart Planning, IMDC-SDSP 2020, Cyperspace, 28-30 June 2020*. 2020.
- [7] B. Yang, Z. Yu, Y. Dong, J. Zhou and W. Hong, "Compact Tapered Slot Antenna Array for 5G Millimeter-Wave Massive MIMO Systems," *IEEE Transactions on Antennas and Propagation*, vol. 65, no. 12, pp. 6721-6727, Dec. 2017.
- [8] Ullah, A., Parchin, N. O., Abdul-Al, M., Manan, W., Salisu, A., Gharbia, I., ... & Abd-Alhameed, R. (2023). Dual-

- Band MIMO Antenna Design for 5G Smartphones Mobile Communications. *Journal of Techniques*, 5(2), 1-9.
- [9] Salisu, Abubakar, et al. "Use of Slots in Bandwidth enhancement of microstrip patch antenna for 5G mobile communication networks." *Proceedings of the 3rd International Multi-Disciplinary Conference: "Integrated Sciences and Technologies", IMDC-IST 2023, 25-27 October 2023, Yola, Nigeria*. 2024.
- [10] C. Mao, S. Gao and Y. Wang, "Broadband high-gain beam-scanning antenna array for millimeter-wave applications," *IEEE Transactions on Antennas and Propagation*, vol. 65, no. 9, pp. 4864-4868, Sept. 2017.
- [11] A. S. I. Amar et al., "Super-Wideband and Highly-Miniaturized Phased Array for MM-Wave Smartphone Applications," 2022 International Telecommunications Conference (ITC-Egypt), Alexandria, Egypt, 2022, pp. 1-4, doi: 10.1109/ITC-Egypt55520.2022.9855725.
- [12] Salisu, A., Ullah, A., Musa, U., Yahya, M. S., Aminu-Baba, M., Akinsolu, M. O., ... & Abd-Alhameed, R. A. (2023, October). Dual Band Antenna Covering Millimeter Wave and Sub-6 GHz Bands for 5G Mobile Applications. In *2023 IEEE International Symposium On Antennas And Propagation (ISAP)* (pp. 1-2). IEEE.
- [13] N. O. Parchin et al., "Wideband and Low-Profile Phased Array Smartphone Antenna Supporting 28-38 GHz," 2021 29th Telecommunications Forum (TELFOR), Belgrade, Serbia, 2021, pp. 1-3, doi: 10.1109/TELFOR52709.2021.9653317.
- [14] "5G Spectrum," GSMA Public Policy Position, March 2020.
- [15] Ali, M. M. M., & Sebak, A. R. (2016, July). Design of compact millimeter wave massive MIMO dual-band (28/38 GHz) antenna array for future 5G communication systems. In *2016 17th International Symposium on Antenna Technology and Applied Electromagnetics (ANTEM)* (pp. 1-2). IEEE.
- [16] Liu, P., Zhu, X. W., Zhang, Y., Wang, X., Yang, C., & Jiang, Z. H. (2020). Patch antenna loaded with paired shorting pins and H-shaped slot for 28/38 GHz dual-band MIMO applications. *IEEE Access*, 8, 23705-23712.
- [17] Farahat, A. E., & Hussein, K. F. (2022). Dual-band (28/38 GHz) wideband MIMO antenna for 5G mobile applications. *IEEE Access*, 10, 32213-32223.
- [18] W. C. Weng, J. Y. Sze, and C. F. Chen, "A dual-broadband circularly polarized slot antenna for WLAN applications," *IEEE Transactions on Antennas and Propagation*, vol. 62, no. 5, pp. 2837-2841, May 2014.
- [19] Dardeer OM, Elsadek HA, Elhennawy HM, Abdallah EA. Single-fed dual wideband filtenna for 4G/5G mobile applications. *Int J RF Microw Comput-Aided Eng*. 2021; 31(5). doi:10.1002/mmce.22616.
- [20] N. O. . Parchin, O. M. . Dardeer, A. S. . Amar, C. H. . See, and R. . Abd-Alhameed, "Dual-Band Phased Array 5G Mobile-Phone Antenna with Switchable and Hemispherical Beam Pattern Coverage for MIMO-Diversity Communications", *ACES Journal*, vol. 36, no. 12, pp. 1602–1609, Mar. 2022.
- [21] Yusnita R and Muhammad I H 2018 Design of 28/38 GHz Dual -Band Triangular -Shaped Slot Microstrip Antenna Array for 5G Applications 2018 2nd International Conf. on Telematics and Future Generation Networks (TAFGEN) (Kuching) p 93 -97
- [22] Chenhao C, Jianfeng Z, Shaowei L, Anding Z and Quan X 2019 28/38 GHz Dual -band Dual polarized Highly Isolated Antenna for 5G Phased Array Applications 2019 IEEE MTT -S International Wireless Symp. (IWS) (Guangzhou/China) p1 -3
- [23] Sarwar K, Johirul I, Jashim U, Imran 2018 Design of a Tri-Band Microstrip Patch Antenna for 5G Application International Conf. on Computer, Communication, Chemical, Material and Electronic Engineering (IC4ME2)
- [24] Nadeem A, Osama H, Muhammad A A and Saleh A 2015 28/38 -GHz dual -band millimeter wave SIW array antenna with EBG structures for 5G applications The 2015 IEEE AP-S Symp. on Antennas and Propagation and URSI CNC/USNC Joint Meeting (Vancouver).
- [25] Salisu, A., et al. "AN INCREASED BANDWIDTH OF A MICROSTRIP PATCH ANTENNA AT 28GHz FOR FUTURE 5G APPLICATIONS." *Nigerian Journal of Engineering Science and Technology Research* 8.2 (2022): 69-74.
- [26] Salisu, Abubakar, et al. "Dual Band Reconfigurable Antenna For Sub 6GHz and Millimeter Wave Bands For 5G Mobile Applications." *Proceedings of the 3rd International Multi-Disciplinary Conference: "Integrated Sciences and Technologies", IMDC-IST 2023, 25-27 October 2023, Yola, Nigeria*. 2024.